

PERFORMANCE VERIFICATION
In Accordance with Approval CA 2020110503



31HH1 Gasket Performance Verification

**POLY IBC UC 2.0 1000 Liter All Plastic Composite IBC with
KTJ Quick Connect II Dip Tube and KTJ Bung Closures**

TEST REPORT #: 23-MN40033A (REV 2)
Design Qualification Report
Reference: 23-MN40033 (REV 2)

TESTING PERFORMED FOR:

RIKUTEC AMERICA, INC.
371 Douglas Road
Whitinsville, MA 01588

ATTN: Alex Pytka

TESTING PERFORMED BY:

TEN-E PACKAGING SERVICES, INC.
1666 County Road 74
Newport, MN 55055
Phone: 651-459-0671
Fax: 651-459-1430

Issue Date: April 25, 2023
Revision Date: August 25, 2023

TABLE OF CONTENTS

PURPOSE AND SCOPE:	3
REGULATORY AND INDUSTRY STANDARD REFERENCES	3
PACKAGING DESCRIPTIONS / COMPONENT DRAWINGS	4
COMPONENT INFORMATION.....	5
TEST PROCEDURES AND RESULTS	10
LEAKPROOFNESS TEST	10
HYDROSTATIC PRESSURE TEST.....	11
DISCLAIMER OF WARRANTIES	12

REVISION HISTORY

Note for Rev 1: Report 23-MN40033A dated April 25, 2023, was revised on June 13, 2023, to correct the spelling of the manufacturer’s name of the bung closures and dip tube on pages 5 & 6.

Note for Rev 2: Report 23-MN40033A dated April 14, 2023, was revised on August 25, 2023 due to the customer requesting to change the name of the dip tube “QC” to “Quick Connect” on page 1, 4, & 6 of the report.

NOTES AND COMMENTS

Reference report 23-MN40033 (Rev 2) for documentation of the complete UN 31HH1 performance tests.

PURPOSE AND SCOPE:

Each different gasket must be tested to demonstrate the top closure with the different gasket installed can withstand a leakproofness test as described in §178.813 and a hydrostatic pressure test in §178.814 as required by paragraph 5b of the Competent Authority approval CA 2020110503.

REGULATORY AND INDUSTRY STANDARD REFERENCES

REGULATORY REFERENCES

TEST	49 CFR ^①	UN ^②	IMDG ^③
	October 2021 Edition	22 nd Edition	2020 Edition
Leakproofness:	178.813	6.5.6.7	6.5.6.7
Hydrostatic Pressure:	178.814	6.5.6.8	6.5.6.8

INDUSTRY STANDARD REFERENCES

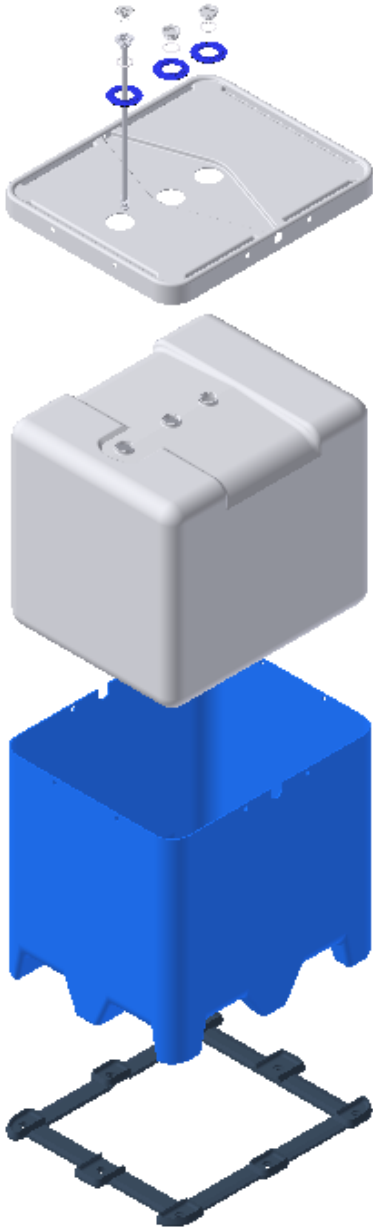
Pressure:	ASTM ^④ D8134: Standard Guide for Conducting Internal Hydrostatic Pressure Tests on United Nations (UN) IBC Design Types
------------------	--

EQUIPMENT


All inspection, measuring and test equipment that can affect product quality is calibrated and adjusted at prescribed intervals, or prior to use, and is traceable to NIST, using ANSI Z540 as an overall guide for calibration certification.


PACKAGING DESCRIPTIONS / COMPONENT DRAWINGS


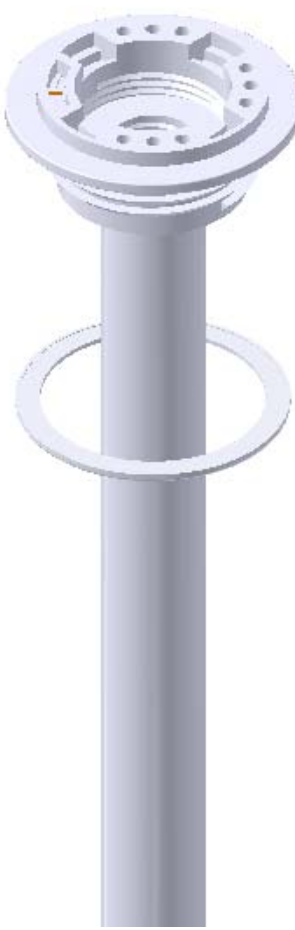
**POLY IBC UC 2.0 1000 Liter All Plastic Composite Framed IBC with
KTJ Quick Connect II Dip Tube and KTJ Bung Closures**

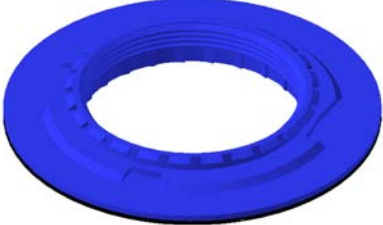
ASSEMBLY DRAWING	TEST LEVELS		
	Certification Type:	Design Qualification	
	Packaging Code Designation:	31HH1	
	Packing Group:	II	
	Specific Gravity:	1.9	
	Test Pressure:	110 kPa	
	TEST SAMPLE PREPARATION (Refer to Section IV)		
	Overall IBC Tare Weight: (Sample #1 and Sample #2)	96.0 Kg	96.0 Lbs.
	Net Fill Weight (98% Maximum Capacity):		
	Water (Sample #1)	1,034.9 Kg	2,281.6 Lbs.
	Methanol/Water (Sample #2)	990.8 Kg	2,184.4 Lbs.
IBC Test Weight:			
Water (Sample #1)	1,130.9 Kg	2,493.1 Lbs.	
Methanol/Water (Sample #2)	1,086.8 Kg	2,395.9 Lbs.	
Maximum Permissible Gross Mass:	2,062.3 Kg	4,546.5 Lbs.	
CLOSING METHODS			
KTJ Quick Connect II Dip Tube Insert:			
Application Torque:	25 Ft-Lbs.		
Equipment:	Torque Wrench #740		
KTJ Quick Connect II Shipping Cap:			
Application Torque:	5 Ft-Lbs.		
Equipment:	Torque Wrench #740		
2" PP Vented Bung Closure:			
Application Torque:	25 Ft-Lbs.		
Equipment:	Torque Wrench #740		
2" PP Closed Bung Closure:			
Application Torque:	25 Ft-Lbs.		
Equipment:	Torque Wrench #740		


COMPONENT INFORMATION

CLOSURE (21310101)		DRAWING
Manufacturer: Kunststofftechnik Jaeger, Braunschweig, Germany		
Description:	2" Non-Vented Buttress Threaded Plug	
Quantity:	2	
Material:	Polypropylene, Natural	
Tare Weight:	34.333 Grams	
Overall Dimensions:		
• Height	34.5 mm (1.358")	
• Diameter	78.7 mm (3.102")	
Thread Dimensions:		
• Major Diameter:	61.9 mm (2.437")	
• Minor Diameter:	54.9 mm (2.162")	
Markings (QC Audit):	2	
PE PROFILE GASKET (22010201)		
Description:	Natural Polyethylene Profile Gasket	
Tare Weight:	2.959 Grams	
Thickness:	3.8 mm (0.15")	
Diameter:	72.4 mm (2.85")	

CLOSURE (21310201)		DRAWING
Manufacturer: Kunststofftechnik Jaeger, Braunschweig, Germany		
Description:	2" Vented Buttress Threaded Plug	
Quantity:	1	
Material:	Polypropylene, Natural with Microporous PTFE Vent	
Tare Weight:	33.727 Grams	
Overall Dimensions:		
• Height	34.5 mm (1.358")	
• Diameter	78.7 mm (3.102")	
Thread Dimensions:		
• Major Diameter:	61.9 mm (2.437")	
• Minor Diameter:	54.9 mm (2.162")	
Markings (QC Audit):	2	
PE PROFILE GASKET (22010201)		
Description:	Natural Polyethylene Profile Gasket	
Tare Weight:	2.454 Grams	
Thickness:	3.8 mm (0.15")	
Diameter:	72.4 mm (2.85")	

CLOSURE (41010051 - DT-62PE-XXX-1040-TF)		DRAWING
Manufacturer: Kunststofftechnik Jaeger, Braunschweig, Germany		
Description:	1-1/2" Quick Connect II Threaded Sealing Cap	
Quantity:	1	
Material:	Polyethylene, Natural	
Tare Weight:	17.088 Grams	
Overall Dimensions:		
• Height	25.1 mm (0.99")	
• Diameter	75.7 mm (2.98")	
Thread Dimensions:		
• T	41.2 mm (1.62")	
• E	38.6 mm (1.52")	
Markings (QC Audit):	www.qc-system.com patented U.S. Pat. No. 6,357,494	
GASKET		
Description:	Polyethylene, Natural	
Tare Weight:	0.546 Grams	
Thickness:	2.8 mm (0.11")	
Diameter:	35.6 mm (1.40")	
DIP TUBE (41010051 - DT-62PE-XXX-1040-TF)		
Manufacturer: Kunststofftechnik Jaeger, Braunschweig, Germany		
Description:	2" Quick Connect II Buttress Threaded Insert with Dip Tube and Bottom Flexible Bellow	
Quantity:	1	
Material:	Polyethylene, Natural	
Tare Weight:	141 Grams	
Overall Dimensions:		
• Height	1,040.0 mm (40.94") (with Dip Tube)	
• Insert Height	34.0 mm (1.34")	
• Diameter	79.0 mm (3.11")	
Thread Dimensions (2" Container - Side):		
• Major Diameter	62.0 mm (2.44")	
• Minor Diameter	54.6 mm (2.15")	
Thread Dimensions (1-1/2" Shipping Cap - Side):		
• Major Diameter	42.7 mm (1.68")	
• Minor Diameter	40.4 mm (1.59")	
Thread Dimensions (3/4" Plug - Side):		
• Major Diameter	26.6 mm (1.05")	
• Minor Diameter	24.0 mm (0.94")	
Markings (QC Audit):	K 1B2 3A4 5C6	
PE PROFILE GASKET (22010201)		
Description:	Natural Polyolefin Profile Gasket	
Tare Weight:	2.965 Grams	
Thickness:	3.8 mm (0.15")	
Diameter:	72.4 mm (2.85")	

CLAMPING NUT (2.0)		DRAWING
Manufacturer: Rikutec America, Inc., Whitinsville, MA		
Description:	Outer Buttress Threaded Clamping Nut used on 2.0 IBC designs	
Quantity:	3 (1 on each opening)	
Material:	Polyethylene, Blue, and Black Rubber	
Tare Weight:	60 Grams	
Overall Dimensions:		
• Height	0.758"	
• Diameter	5.905"	
Thread Dimensions:		
• T	3.446"	
• E	3.245"	
Markings (QC Audit):	RIKUTEC 1/23 SPI "2" Recycling Symbol	

PLASTIC INNER RECEPTACLE (2.0)		DRAWING
Manufacturer: Rikutec America, Inc., Whitinsville, MA		
Description:	Rikutec 2.0 1000 Liter Rigid Inner Receptacle with (3) 2" Buttress Threaded Top Fill Port Openings	
Material:	High Density Polyethylene, Natural	
Resin Type:	Two Layer Wall Design: <ul style="list-style-type: none"> • Inside: Lupolen 4261 A Q149 • Outside: Lupolen 4261 AG UV 60005 	
Method of Manufacture:	Blow Molded	
Tare Weight:	50.71 Lbs. (23.0 Kg)	
Capacity:		
• Rated	1,000 Liter	
• Overflow	281.4 Gallons (1,065.0 Liter)	
Overall Dimensions:		
• Length	1,155.7 mm (45.50")	
• Width	962.5 mm (37.88")	
• Height	1,044.7 mm (41.13")	
2" Fill Port Opening Thread Dimensions		
• Major Diameter	64.8 mm (2.55")	
• Minor Diameter	57.1 mm (2.25")	
Clamping Nut Thread Dimensions		
• Major Diameter	85.5 mm (3.37")	
• Minor Diameter	81.2 mm (3.20")	
Dip Tube Opening Thread Dimensions		
• Major Diameter	64.8 mm (2.55")	
• Minor Diameter	57.4 mm (2.26")	
Wall Thickness (Minimum):	2.387 mm (0.09")	
Markings (QC Audit):	<div style="display: flex; align-items: center;"> <div style="border: 1px solid black; border-radius: 50%; padding: 2px; margin-right: 10px;">u n</div> <div> 31HH1 / Y / 0123 / D / BAM 6808-RIKUTEC RIKUTEC 238528MD7 22/l Made in Germany SPI "2" PE-HD Recycling Symbol </div> </div>	

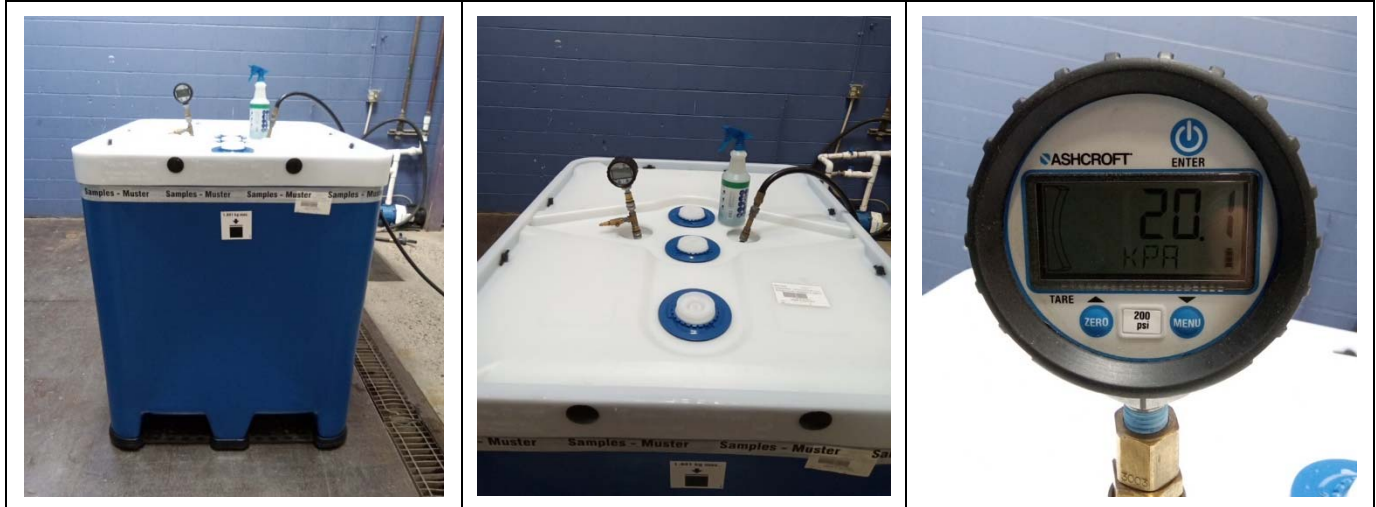
COVER – POLY BOX (2.0)		DRAWING
Manufacturer: Rikutec America, Inc., Whitinsville, MA		
Description:	Top HUVEX cover with (3) Access Holes Secured to Tote with (8) Plastic Pins	
Quantity:	1	
Material:	High Density Polyethylene, Natural	
Tare Weight:	10.5 Kg (23.15 Lbs.)	
Overall Dimensions:		
• Length	1,212.9 mm (47.75")	
• Width	1,003.3 mm (39.50")	
• Height	962.2 mm (37.88")	
• Small Hole Diameter	142.0 mm (5.63")	
• Large Hole Diameter	177.8 mm (7.00")	
Markings (QC Audit):	(u n) 31HH1 / Y / 0123 / D / BAM / 6808 RIKUTEC / 3314 / 2070 / TR6F142 POLY-IBC UC 1000 Max Capacity 1050 Liter / Tare 96kg Gauge of Pressure" 100 kPa Hersteller: RIKUTEC Made in Germany SPI "2" PE HD Recycling Symbol	
FRAMED BASE – POLY BOX		
Manufacturer: Rikutec America, Inc., Whitinsville, MA		
Description:	4-Way Entry Plastic Outer Tote	
Quantity:	1	
Material:	HDPE / Foam / HDPE	
Tare Weight:	61.5 Kg (135.6 Lbs.) (with Bottom Frame)	
Overall Dimensions:		
• Length	1,193.8 mm (47.00")	
• Width	990.6 mm (39.00")	
• Height	1,168.4 mm (46.00")	
FRAMED PALLET		
Description:	Molded Pallet Feet and Bottom Detachable Plastic Framed Pallet with (8) Plastic Screws and Bolts	
Markings (QC Audit):		
• Frame	SPI "2" PE-HD Recycling Symbol	
• Box	None	

TEST PROCEDURES AND RESULTS

LEAKPROOFNESS TEST

TEST INFORMATION		TEST CRITERIA
TEST CONTENTS:	Empty	<ul style="list-style-type: none"> For all IBC design types intended to contain solids that are loaded or discharged under pressure or intended to contain liquids, there may be no leakage of air from the IBC. (§178.813)
SAMPLE PREPARATION:	Refer to Section II	
CONDITIONING:	Ambient	
TEST PRESSURE:	20 kPa	
TEST DURATION:	10 Minutes	
AREA OF PRESSURIZATION:	Through Top Head	
TEST EQUIPMENT:	Regulated Air Source #: 2 Pressure Gauge #: 615 & 641	

LEAKPROOFNESS TEST SET-UP PHOTOS



LEAKPROOFNESS TEST RESULTS

Sample I.D.	Gasket	Test Date	Results	Comments/Observations
1	PE Profile Gaskets	April 24, 2023	PASS	The IBC met the criteria for passing the test. No leakage.

HYDROSTATIC PRESSURE TEST

TEST INFORMATION		TEST CRITERIA
TEST CONTENTS:	Water	<ul style="list-style-type: none"> For rigid plastic and composite Framed IBC design types intended to contain solids loaded or discharged under pressure or intended to contain liquids, there may be no leakage and no permanent deformation which renders the IBC unsafe for transportation. (§178.814)
WATER TEMPERATURE:	20.1°C (68.2°F)	
FILL CAPACITY:	Maximum Capacity	
SAMPLE PREPARATION:	Refer to Section II	
CONDITIONING:	Ambient	
TEST PRESSURE:	110 kPa	
TEST DURATION:	10 Minutes	
AREA OF PRESSURIZATION:	Through Top Head	
TEST EQUIPMENT:	Regulated Water Source #: 2 Pressure Gauge #: 615 & 641	

HYDROSTATIC PRESSURE TEST SET-UP PHOTOS



HYDROSTATIC PRESSURE TEST RESULTS

Sample I.D.	Gasket	Test Date	Results	Comments/Observations
1	PE Profile Gaskets	April 25, 2023	PASS	The IBC met the criteria for passing the test. No leakage.

DISCLAIMER OF WARRANTIES

TEN-E PACKAGING SERVICES, INC. certifies that the previously described testing services have been performed in accordance with standard good laboratory practices and the Department of Transportation's Title 49 CFR §178.813 and §178.814. The results included within this test report relate only to the items tested. ALL OTHER WARRANTIES, EXPRESSED OR IMPLIED, INCLUDING ANY WARRANTY THAT THE PACKAGING TESTED IS MERCHANTABLE, FIT FOR A PARTICULAR PURPOSE OR IN COMPLIANCE WITH ANY FEDERAL OR STATE REGULATIONS, ARE DISCLAIMED



Oscar Mejia
Technician
TEN-E Packaging Services, Inc.
1666 County Road 74
Newport, MN 55055



Tyler Kinderman
Packaging Engineer
TEN-E Packaging Services, Inc.
1666 County Road 74
Newport, MN 55055