

**UNITED NATIONS / DOT  
PERFORMANCE CERTIFICATION**



**31HH1 DESIGN QUALIFICATION**

**POLY IBC UC 2.0 1000 Liter All Plastic Composite Euro IBC  
with KTJ Quick Connect III Dip Tube and KTJ Bung Closures**

**TEST REPORT #: 23-MN40034 (REV 2)**



31HH1 / Y / \* / USA / +AA11220 / 0 / 2010

\* Insert the month and year (last two digits) of manufacture

**TESTING PERFORMED FOR:**

**RIKUTEC AMERICA, INC.**

371 Douglas Road  
Whitinsville, MA 01588

**ATTN: Alex Pytko**

**TESTING PERFORMED BY:**

**TEN-E PACKAGING SERVICES, INC.**

1666 County Road 74  
Newport, MN 55055  
Phone: 651-459-0671  
Fax: 651-459-1430

Issue Date: May 5, 2023  
Revision Date: August 25, 2023

## TABLE OF CONTENTS

<b>SECTION I: CERTIFICATION .....</b>	<b>3</b>
<b>SECTIONS II &amp; V: PACKAGING DESCRIPTIONS / COMPONENT DRAWINGS .....</b>	<b>4</b>
COMPONENT INFORMATION .....	5
<b>SECTION III: TEST PROCEDURES AND RESULTS.....</b>	<b>10</b>
VIBRATION TEST .....	10
BOTTOM LIFT TEST .....	11
LEAKPROOFNESS TEST .....	12
HYDROSTATIC PRESSURE TEST .....	13
DROP TEST .....	14
<b>REGULATORY AND INDUSTRY STANDARD REFERENCES.....</b>	<b>15</b>
<b>SECTION IV MATHEMATICAL CALCULATIONS .....</b>	<b>16</b>

## REVISION HISTORY

**Note for Rev 2:** Report 23-MN40034 dated May 5, 2023, was revised on August 25, 2023 due to the customer requesting to change the name of the dip tube “QC” to “Quick Connect” on pages 1, 3, 4, & 6 of the report.

**Note for Rev 1:** Report 23-MN40034 dated May 5, 2023, was revised on June 13, 2023, to correct the spelling of the manufacturer’s name of the bung closures and dip tube on pages 5 & 6.

## NOTES AND COMMENTS


Reference report 23-MN40034A (Rev 2) for documentation of the leakproofness and hydrostatic pressure testing conducted on alternate gasket options covered under Rikutec America, Inc. competent authority approval number 2020110503.

**SECTION I: CERTIFICATION**

**DESIGN QUALIFICATION of the Rikutec America, Inc.  
 POLY IBC UC 2.0 1000 Liter All Plastic Composite Euro IBC with  
 KTJ Quick Connect III Dip Tube and KTJ Bung Closures**

TEN-E Packaging Services, Inc. is a current DOT UN Third-Party Certification Agency under §107.403 and certifies that the Rikutec America, Inc. packaging referenced above has passed the standards of the DEPARTMENT OF TRANSPORTATION'S TITLE 49 CFR; Performance Oriented Packaging Standards, Section 178. This package is also certified under IMDG and the UN Recommendations on the Transport of Dangerous Goods. It is the responsibility of the end user to determine authorization for use under these regulations. The use of other packaging methods or components other than those documented in this report may render this certification invalid.

**SUMMARY OF PERFORMANCE TESTS**

UN / DOT TEST	49 CFR REFERENCE	TEST LEVEL	TEST CONTENTS	TEST COMPLETED	TEST RESULTS
Vibration	178.819	3.7 Hz – 1 Hour	Water	May 2, 2023	PASS
Bottom Lift	178.811	2,727.4 Kg	Water	May 2, 2023	PASS
Leakproofness	178.813	20 kPa – 10 Minutes	Empty	May 5, 2023	PASS
Hydrostatic	178.814	110 kPa – 10 Minutes	Water	May 5, 2023	PASS
Drop	178.810	1.9 m	Methanol/Water	May 1, 2023	PASS
<b>TEST REPORT NUMBER:</b>			23-MN40034		
<b>UN MARKING: (CFR 49 – 178.703)</b>			 31HH1 / Y / * / USA / +AA11220 / 0 / 2010		
<b>PACKAGING IDENTIFICATION CODE:</b>			31HH1 (178.707 Composite IBC)		
<b>PERFORMANCE STANDARD:</b>			Y (Packaging meets Packing Group II and III tests)		
<b>MONTH AND YEAR OF MANUFACTURE:</b>			*		
<b>STATE AUTHORIZING ALLOCATION OF THE MARK:</b>			USA		
<b>PACKAGING CERTIFICATION AGENCY:</b>			(+AA) TEN-E Packaging Services, Inc. (Newport, MN CAA #2006030022)		
<b>THIRD PARTY PACKAGING IDENTIFICATION:</b>			+AA11220		
<b>STACKING TEST LOAD:</b>			0 Kg (not intended to be stacked in transportation)		
<b>MAXIMUM PERMISSIBLE GROSS MASS:</b>			2,010 Kg (4,431 Lbs.)		
<b>PERIODIC DESIGN REQUALIFICATION DATE:</b>			May 5, 2024		
<b>ADDITIONAL REQUIRED RIGID PLASTIC &amp; COMPOSITE IBC MARKINGS (CFR 49 – 178.703(b)):</b>					
<b>RATED CAPACITY AT 20°C (liters):</b>			1000 Liters		
<b>TARE MASS (Kg):</b>			Insert individual IBC tare mass		
<b>GAUGE TEST PRESSURE (kPa):</b>			110 kPa		
<b>DATE OF LAST LEAKPROOFNESS TEST:</b>			Insert Month & Year of Last Leakproofness Test		
<b>DATE OF LAST INSPECTION:</b>			Insert Month & Year of Last Inspection		

ALL OTHER WARRANTIES, EXPRESSED OR IMPLIED, INCLUDING ANY WARRANTY THAT THE PACKAGING TESTED IS MERCHANTABLE OR FIT FOR A PARTICULAR PURPOSE, ARE DISCLAIMED. In no event shall TEN-E Packaging Services, Inc. liability exceed the total amount paid by Rikutec America, Inc. for services rendered. In the event of future changes to the above referenced test standards, it is the responsibility of Rikutec America, Inc. to determine whether additional testing or updating of past testing is necessary to verify that the packaging we have tested remains in compliance with those standards.

**MANUFACTURER:**

Rikutec America, Inc.

371 Douglas Road  
 Whitinsville, MA 01588



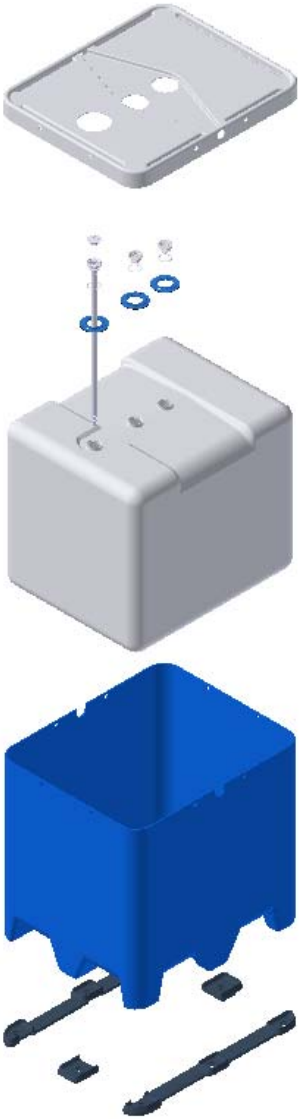
Oscar Mejia  
 Technician  
 TEN-E Packaging Services, Inc.  
 1666 County Road 74  
 Newport, MN 55055



Tyler Kinderman  
 Packaging Engineer  
 TEN-E Packaging Services, Inc.  
 1666 County Road 74  
 Newport, MN 55055

**SECTIONS II & V: PACKAGING DESCRIPTIONS / COMPONENT DRAWINGS**



**POLY IBC UC 2.0 1000 Liter All Plastic Composite Euro IBC with  
KTJ Quick Connect III Dip Tube and KTJ Bung Closures**

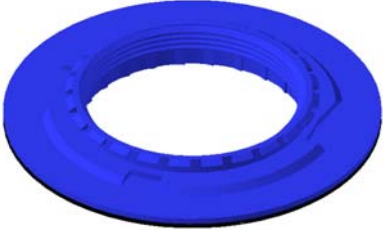
ASSEMBLY DRAWING	TEST LEVELS		
	Certification Type:	Design Qualification	
	Packaging Code Designation:	31HH1	
	Packaging Group:	II	
	Specific Gravity:	1.9	
	Test Pressure:	110 kPa	
	<b>TEST SAMPLE PREPARATION</b> (Refer to Section IV)		
	Overall IBC Tare Weight: (Sample #1 and Sample #2)	98.0 Kg	216.1 Lbs.
	Net Fill Weight (98% Maximum Capacity):		
	Water (Sample #1)	1,041.8 Kg	2,296.8 Lbs.
	Methanol/Water (Sample #2)	966.3 Kg	2,130.4 Lbs.
	IBC Test Weight:		
	Water (Sample #1)	1,139.8 Kg	2,512.8 Lbs.
	Methanol/Water (Sample #2)	1,064.3 Kg	2,346.3 Lbs.
	Maximum Permissible Gross Mass:	2,077.4 Kg	4,579.8 Lbs.
<b>CLOSING METHODS</b>			
<b>KTJ Quick Connect III Dip Tube Insert:</b>			
Application Torque:	25 Ft-Lbs.		
Equipment:	Torque Wrench #740		
<b>KTJ Quick Connect III Shipping Cap:</b>			
Application Torque:	5 Ft-Lbs.		
Equipment:	Torque Wrench #740		
<b>2" PP Vented Bung Closure:</b>			
Application Torque:	25 Ft-Lbs.		
Equipment:	Torque Wrench #740		
<b>2" PP Closed Bung Closure:</b>			
Application Torque:	25 Ft-Lbs.		
Equipment:	Torque Wrench #740		


**COMPONENT INFORMATION**

CLOSURE (21310101)		DRAWING
<b>Manufacturer: Kunststofftechnik Jaeger, Braunschweig, Germany</b>		
<b>Description:</b>	2" Non-Vented Buttress Threaded Plug	
<b>Quantity:</b>	2	
<b>Material:</b>	Polypropylene, Natural	
<b>Tare Weight:</b>	34.333 Grams	
<b>Overall Dimensions:</b>		
• <b>Height</b>	34.5 mm (1.358")	
• <b>Diameter</b>	78.7 mm (3.102")	
<b>Thread Dimensions:</b>		
• <b>Major Diameter:</b>	61.9 mm (2.437")	
• <b>Minor Diameter:</b>	54.9 mm (2.162")	
<b>Markings (QC Audit):</b>	2	
<b>POE PROFILE GASKET (22010202):</b>		
<b>Description:</b>	Natural Polyolefin Profile Gasket	
<b>Tare Weight:</b>	2.533 Grams	
<b>Thickness:</b>	3.8 mm (0.15")	
<b>Diameter:</b>	72.5 mm (2.85")	

CLOSURE (21310201)		DRAWING
<b>Manufacturer: Kunststofftechnik Jaeger, Braunschweig, Germany</b>		
<b>Description:</b>	2" Vented Buttress Threaded Plug	
<b>Quantity:</b>	1	
<b>Material:</b>	Polypropylene, Natural with Microporous PTFE Vent	
<b>Tare Weight:</b>	33.727 Grams	
<b>Overall Dimensions:</b>		
• <b>Height</b>	34.5 mm (1.358")	
• <b>Diameter</b>	78.7 mm (3.102")	
<b>Thread Dimensions:</b>		
• <b>Major Diameter:</b>	61.9 mm (2.437")	
• <b>Minor Diameter:</b>	54.9 mm (2.162")	
<b>Markings (QC Audit):</b>	2	
<b>POE PROFILE GASKET (22010202):</b>		
<b>Description:</b>	Natural Polyolefin Profile Gasket	
<b>Tare Weight:</b>	2.533 Grams	
<b>Thickness:</b>	3.8 mm (0.15")	
<b>Diameter:</b>	72.5 mm (2.85")	

CLOSURE (44020001 - DT3-62PP-XXX-1040-TF)		DRAWING
<b>Manufacturer: Kunststofftechnik Jaeger, Braunschweig, Germany</b>		
<b>Description:</b>	2" Quick Connect III Threaded Sealing Cap	
<b>Quantity:</b>	1	
<b>Material:</b>	Polypropylene, Natural	
<b>Tare Weight:</b>	50.645 Grams	
<b>Overall Dimensions:</b>		
• <b>Height</b>	26.1 mm (1.03")	
• <b>Diameter</b>	78.1 mm (3.07")	
<b>Thread Dimensions:</b>		
• <b>T</b>	52.1 mm (2.05")	
• <b>E</b>	50.0 mm (1.97")	
<b>Markings (QC Audit):</b>	None	
<b>O-RING</b>		
<b>Description:</b>	FEP Encapsulated O-Ring	
<b>Tare Weight:</b>	2.345 Grams	
<b>Thickness:</b>	3.5 mm (0.14")	
<b>Diameter:</b>	48.3 mm (1.90")	
<b>DIP TUBE (44020001 – DT3-62PP-XXX-1040-TF)</b>		
<b>Manufacturer: Kunststofftechnik Jaeger, Braunschweig, Germany</b>		
<b>Description:</b>	2" Quick Connect III Buttress Threaded Insert with Dip Tube and Bottom Flexible Bellow	
<b>Quantity:</b>	1	
<b>Material:</b>	Polypropylene, Natural	
<b>Tare Weight:</b>	147 Grams	
<b>Overall Dimensions:</b>		
• <b>Height</b>	1,047.7 mm (41.25") (with Dip Tube)	
• <b>Insert Height</b>	32.6 mm (1.28")	
• <b>Diameter</b>	80.3 mm (3.16")	
<b>Thread Dimensions (2" Container - Side):</b>		
• <b>Major Diameter</b>	61.5 mm (2.42")	
• <b>Minor Diameter</b>	55.2 mm (2.17")	
<b>Thread Dimensions (1-1/2" Shipping Cap - Side):</b>		
• <b>Major Diameter</b>	53.5 mm (2.10")	
• <b>Minor Diameter</b>	51.3 mm (2.02")	
<b>Markings (QC Audit):</b>	None	
<b>POE PROFILE GASKET (22010202):</b>		
<b>Description:</b>	Natural Polyolefin Profile Gasket	
<b>Tare Weight:</b>	2.533 Grams	
<b>Thickness:</b>	3.8 mm (0.15")	
<b>Diameter:</b>	72.4 mm (2.85")	

CLAMPING NUT (2.0)		DRAWING
<b>Manufacturer: Rikutec America, Inc., Whitinsville, MA</b>		
<b>Description:</b>	Outer Buttress Threaded Bulkhead Fitting used on 2.0 IBC designs	
<b>Quantity:</b>	3 (1 on each opening)	
<b>Material:</b>	Polyethylene, Blue, and Black Rubber	
<b>Tare Weight:</b>	60 Grams	
<b>Overall Dimensions:</b>		
• <b>Height</b>	0.758"	
• <b>Diameter</b>	5.905"	
<b>Thread Dimensions:</b>		
• <b>T</b>	3.446"	
• <b>E</b>	3.245"	
<b>Markings (QC Audit):</b>	RIKUTEC 1/23 SPI "2" Recycling Symbol	

PLASTIC INNER RECEPTACLE (2.0)		DRAWING
<b>Manufacturer: Rikutec America, Inc., Whitinsville, MA</b>		
<b>Description:</b>	Rikutec 2.0 1000 Liter Rigid Inner Receptacle with (3) 2" Buttress Threaded Top Fill Port Openings	
<b>Material:</b>	High Density Polyethylene, Natural	
<b>Resin Type:</b>	Two Layer Wall Design: <ul style="list-style-type: none"> <li>• Inside: Lupolen 4261 A Q149</li> <li>• Outside: Lupolen 4261 AG UV 60005</li> </ul>	
<b>Method of Manufacture:</b>	Blow Molded	
<b>Tare Weight:</b>	50.71 Lbs. (23.0 Kg)	
<b>Capacity:</b>		
• <b>Rated</b>	1,000 Liter	
• <b>Overflow</b>	280.8 Gallons (1,063.0 Liters)	
<b>Overall Dimensions:</b>		
• <b>Length</b>	1,155.7 mm (45.50")	
• <b>Width</b>	962.5 mm (37.88")	
• <b>Height</b>	1,044.7 mm (41.13")	
<b>2" Fill Port Opening Thread Dimensions</b>		
• <b>Major Diameter</b>	64.8 mm (2.55")	
• <b>Minor Diameter</b>	57.1 mm (2.25")	
<b>Clamping Nut Thread Dimensions</b>		
• <b>Major Diameter</b>	85.5 mm (3.37")	
• <b>Minor Diameter</b>	81.2 mm (3.20")	
<b>Dip Tube Opening Thread Dimensions</b>		
• <b>Major Diameter</b>	64.8 mm (2.55")	
• <b>Minor Diameter</b>	57.4 mm (2.26")	
<b>Wall Thickness (Min.):</b>	2.387 mm (0.09")	
<b>Markings (QC Audit):</b>	(u/n) 31HH1 / Y / 0123 / D / BAM 6808-RIKUTEC RIKUTEC 22/l 23S493MD7 Made in Germany SPI "2" PE-HD Recycling Symbol	




COVER – POLY BOX (2.0)		DRAWING
<b>Manufacturer: Rikutec America, Inc., Whitinsville, MA</b>		
<b>Description:</b>	Top HUVEX with (3) Access Holes Secured to Tote with (8) Plastic Pins	
<b>Quantity:</b>	1	
<b>Material:</b>	High Density Polyethylene, Natural	
<b>Tare Weight:</b>	11.0 Kg (24.25 Lbs.)	
<b>Overall Dimensions:</b>		
• <b>Length</b>	1,212.9 mm (47.75")	
• <b>Width</b>	1,003.3 mm (39.50")	
• <b>Height</b>	962.2 mm (37.88)	
• <b>Small Hole Diameter</b>	142.0 mm (5.63")	
• <b>Large Hole Diameter</b>	177.8 mm (7.00")	
<b>Markings (QC Audit):</b>	(u) 31HH1 / Y / 0123 / D / BAM / 6808 (n) RIKUTEC / 3314 / 2070 / TR6F142 POLY-IBC UC 1000 Max Capacity 1060 Liter / Tare 96kg Gauge of Pressure" 100 kPa Hersteller: RIKUTEC SPI "2" PE HD Recycling Symbol	
EURO BASE – POLY BOX		
<b>Manufacturer: Rikutec America, Inc., Whitinsville, MA</b>		
<b>Description:</b>	4-Way Entry Plastic Outer Tote	
<b>Quantity:</b>	1	
<b>Material:</b>	High Density Polyethylene, Blue and Black	
<b>Tare Weight:</b>	62.5 Kg (137.79 Lbs.) (with Bottom Frame)	
<b>Overall Dimensions:</b>		
• <b>Length</b>	1,193.8 mm (47.00")	
• <b>Width</b>	990.6 mm (39.00")	
• <b>Height</b>	1,168.4 mm (46.00")	
EURO PALLET:		
<b>Description:</b>	Molded Pallet Feet and Bottom Detachable Plastic Euro Pallet with (8) Plastic Screws and Bolts	
<b>Markings (QC Audit):</b>		
• <b>Frame</b>	SPI "2" PE-HD Recycling Symbol	
• <b>Box</b>	None	

**SECTION III: TEST PROCEDURES AND RESULTS**

**VIBRATION TEST**

TEST INFORMATION		TEST CRITERIA
<b>TEST CONTENTS:</b>	Water	<ul style="list-style-type: none"> <li>An IBC passes the vibration test if there is no rupture or leakage. (§178.819)</li> </ul>
<b>SAMPLE PREPARATION:</b>	Refer to Section II	
<b>CONDITIONING:</b>	Ambient	
<b>TABLE DISPLACEMENT:</b>	1"	
<b>TEST FREQUENCY:</b>	3.7 Hz	
<b>TEST DURATION:</b>	1 Hour	
<b>TEST EQUIPMENT:</b>	Vertical motion using L.A.B. 10000 Transportation Simulator	




**VIBRATION TEST SET-UP AND RESULTS (SAMPLE #1)**

	Results	Comments/Observations
	<b>PASS</b>	<p>The IBC met the criteria for passing the test.</p> <p>No leakage or damage.</p>

**BOTTOM LIFT TEST**

TEST INFORMATION		TEST CRITERIA
<b>TEST CONTENTS:</b>	Water	<ul style="list-style-type: none"> <li>For all IBC design types designed to be lifted from the base, there may be no permanent deformation which renders the IBC unsafe for transportation and no loss of contents.</li> </ul> (§178.811)
<b>SAMPLE PREPARATION:</b>	Refer to Section II	
<b>CONDITIONING:</b>	Ambient	
<b>NUMBER OF LIFTS:</b>	8 (Four-Way Entry with 2 Lifts per Direction of Entry)	
<b>FORK TINE PENETRATION:</b>	Entry 1 & 2: 36" Entry 3 & 4: 30"	
<b>COMBINED GROSS MASS LIFTED:</b>	2,727.4 Kg (6,012.8 Lbs.) (Refer to Section IV)	
<b>TEST EQUIPMENT:</b>	Fork Truck Dead Load Weights	

**BOTTOM LIFT TEST SET-UP AND RESULTS (SAMPLE #1)**

Direction of Entry #1	Direction of Entry #2	Direction of Entry #3	Direction of Entry #4
			
Results		Comments/Observations	
Lift #1: <b>PASS</b>	Lift #5: <b>PASS</b>	The IBC met the criteria for passing the test.  No leakage or damage.	
Lift #2: <b>PASS</b>	Lift #6: <b>PASS</b>		
Lift #3: <b>PASS</b>	Lift #7: <b>PASS</b>		
Lift #4: <b>PASS</b>	Lift #8: <b>PASS</b>		

**LEAKPROOFNESS TEST**

TEST INFORMATION		TEST CRITERIA
<b>TEST CONTENTS:</b>	Empty	<ul style="list-style-type: none"> <li>For all IBC design types intended to contain solids that are loaded or discharged under pressure or intended to contain liquids, there may be no leakage of air from the IBC. (§178.813)</li> </ul>
<b>SAMPLE PREPARATION:</b>	Refer to Section II	
<b>CONDITIONING:</b>	Ambient	
<b>TEST PRESSURE:</b>	20 kPa	
<b>TEST DURATION:</b>	10 Minutes	
<b>AREA OF PRESSURIZATION:</b>	Through Top Head	
<b>TEST EQUIPMENT:</b>	Regulated Air Source #: 2 Pressure Gauge #: 615 & 641	




**LEAKPROOFNESS TEST SET-UP AND RESULTS (SAMPLE #1)**

Set-Up Photo	Leakproofness Photo	Leakproofness Photo
		
Results	Comments/Observations	
Pass	The IBC met the criteria for passing the test. No leakage.	

**HYDROSTATIC PRESSURE TEST**

TEST INFORMATION		TEST CRITERIA
<b>TEST CONTENTS:</b>	Water	<ul style="list-style-type: none"> <li>For rigid plastic and composite IBC design types intended to contain solids loaded or discharged under pressure or intended to contain liquids, there may be no leakage and no permanent deformation which renders the IBC unsafe for transportation. (§178.814)</li> </ul>
<b>WATER TEMPERATURE:</b>	20.1°C (68.2°F)	
<b>FILL CAPACITY:</b>	Maximum Capacity	
<b>SAMPLE PREPARATION:</b>	Refer to Section II	
<b>CONDITIONING:</b>	Ambient	
<b>TEST PRESSURE:</b>	110 kPa	
<b>TEST DURATION:</b>	10 Minutes	
<b>AREA OF PRESSURIZATION:</b>	Through Top Head	
<b>TEST EQUIPMENT:</b>	Regulated Water Source #: 2 Pressure Gauge #: 615 & 641	





**HYDROSTATIC PRESSURE TEST SET-UP AND RESULTS (SAMPLE #1)**

Set-Up Photo	Hydrostatic Pressure Photo	Hydrostatic Pressure Photo
		
Results	Comments/Observations	
Pass	The IBC met the criteria for passing the test. No leakage.	

**DROP TEST**

TEST INFORMATION		TEST CRITERIA
<b>TEST CONTENTS:</b>	Methanol/Water Solution (0.967 SG)	<ul style="list-style-type: none"> <li>For all IBC design types, there may be no damage which renders the IBC unsafe to be transported for salvage or for disposable, and no loss of contents.</li> <li>The IBC shall be capable of being lifted by an appropriate means until clear of the floor for five minutes.</li> <li>A slight discharge from closures upon impact is not considered a failure provided that no further leakage occurs. (§178.810)</li> </ul>
<b>SAMPLE PREPARATION:</b>	Refer to Section II	
<b>CONDITIONING:</b>	-18°C (0°F) Chamber #202	
<b>TEST CONTENTS TEMP.:</b>	-18.1°C (-0.6°F)	
<b>DROP HEIGHT:</b>	1.9 Meters (75") (Refer to Section IV)	
<b>DROP ORIENTATION:</b>	Most Vulnerable Part of Base	
<b>TEST EQUIPMENT:</b>	Quick Release Hook Mechanism 5 Ton Overhead Hoist	

**DROP TEST SET-UP AND RESULTS (SAMPLE #2)**

Set-Up Photo	Post Drop Photos		
			
Results	Comments/Observations		
<b>Pass</b>	<p>The IBC met the criteria for passing the test. The outer shell cracked just above the pallet feet in the middle. No leakage.</p>		

## REGULATORY AND INDUSTRY STANDARD REFERENCES

### REGULATORY REFERENCES

TEST	49 CFR <sup>①</sup>	UN <sup>②</sup>	IMDG <sup>③</sup>
	October 2022 Edition	22 <sup>nd</sup> Edition	2022 Edition
<b>Vibration:</b>	178.819	6.5.6.13	---
<b>Bottom Lift:</b>	178.811	6.5.6.4	6.5.6.4
<b>Leakproofness:</b>	178.813	6.5.6.7	6.5.6.7
<b>Hydrostatic Pressure:</b>	178.814	6.5.6.8	6.5.6.8
<b>Drop:</b>	178.810	6.5.6.9	6.5.6.9

① United States Department of Transportation Code of Federal Regulations (CFR) Title 49, Transportation, Parts 100-185

② The United Nations Recommendations on the Transport of Dangerous Goods – Model Regulations (UN – Orange Book)

③ International Maritime Dangerous Goods Code (IMDG)

### INDUSTRY STANDARD REFERENCES

<b>Vibration:</b>	ASTM <sup>④</sup> D7387:	Standard Test Method for Vibration Testing of IBCs Used for Shipping Liquid Hazardous Materials (Dangerous Good)
	ISO <sup>⑤</sup> 2247:	Packaging – Complete, Filled Transport Packages – Vibration Test at Fixed Low Frequency
<b>Pressure:</b>	ASTM <sup>④</sup> D8134:	Standard Guide for Conducting Internal Hydrostatic Pressure Tests on United Nations (UN) IBC Design Types
<b>Drop:</b>	ASTM <sup>④</sup> D5276:	Standard Test Method for Drop Test of Loaded Containers by Free Fall
	ASTM <sup>④</sup> D7790:	Standard Test Method for the Preparation of Plastic Packagings Containing Liquids for United Nations (UN) Drop Testing
	ISO <sup>⑤</sup> 2248:	Packaging – Complete, Filled Transport Packages – Vertical Impact Test by Dropping

④ American Society for Testing and Materials (ASTM)

⑤ International Organization for Standardization (ISO)

### EQUIPMENT

All inspection, measuring and test equipment that can affect product quality is calibrated and adjusted at prescribed intervals, or prior to use, and is traceable to NIST, using ANSI Z540 as an overall guide for calibration certification.

**SECTION IV MATHEMATICAL CALCULATIONS**

**INFORMATION USED FOR CALCULATIONS**

Overall IBC Tare Weight (IBCTW)-Sample 1:	98.0 Kg	216.1 Lbs.
Overall IBC Tare Weight (IBCTW)-Sample 2:	98.0 Kg	216.1 Lbs.
Overflow Capacity (OFC):		
Water	1,063.0 Kg	2,343.5 Lbs.
Methanol/Water	986.0 Kg	2,173.7 Lbs.
Actual Load Applied for Bottom Lift (BLALA):	1,587.6 Kg	3,500.0 Lbs.
Packing Group	II	
Product Specific Gravity (PSG):	1.90	<b>Min Wt To Be Applied</b>
Packing Group Multiplication Factor (MF):	1.00	3,211.6 Lbs. (Btm Lift)
# of IBC Stacked During Transportation (#IBC):	0	

**98% OF OVERFLOW**

Overflow Capacity (OFC) x 98%

<u>OFC</u>	x	<u>98%</u>					
1,063.0	x	98% =	<b>1,041.8</b>	<b>Kg</b>	<b>2,296.8</b>	<b>Lbs. Water</b>	<b>Sample #1</b>
986.0	x	98% =	<b>966.3</b>	<b>Kg</b>	<b>2,130.4</b>	<b>Lbs. Methanol/Water</b>	<b>Sample #2</b>

**IBC TEST WEIGHT (IBCW)**

Overall IBC Tare Weight (IBCTW) + 98% Overflow Capacity (OFC)

<u>IBCTW</u>	+	<u>98% OFC =</u>					
98.0	+	1,041.8	<b>1,139.8</b>	<b>Kg</b>	<b>2,512.8</b>	<b>Lbs. Water</b>	<b>Sample #1</b>
98.0	+	966.3	<b>1,064.3</b>	<b>Kg</b>	<b>2,346.3</b>	<b>Lbs. Methanol/Water</b>	<b>Sample #2</b>

**AUTHORIZED IBC GROSS MASS (AIBCGM)**

Overall IBC Tare Weight (IBCTW) + (Product SG (PSG) x 98% Overflow (OFC))

<u>IBCTW</u>	+	<u>(PSG</u>	x	<u>98% OFC)</u>			
98.0	+	1.90	x	1,041.8			
		<b>2,077.4</b>	<b>Kg</b>	<b>4,579.8</b>	<b>Lbs.</b>		



**BOTTOM LIFT CALCULATIONS**

The IBC must be loaded to 1.25 times the combined maximum permissible gross mass with load being evenly distributed

**Minimum Required Load**

Authorized IBC Gross Mass x 1.25

<u>ABCGM</u>	x	<u>1.25</u>	=	<u>Minimum Required Load</u>		
2,077.4	x	1.25	=	<b>2,596.9 Kg</b>	<b>5,725.1</b>	<b>Lbs.</b>

**Combined Gross Mass Lifted**

Actual Load Applied (ALA) + IBC Test Weight (IBCW)

<u>IBCW</u>	+	<u>ALA</u>	=	<u>Total Load Lifted</u>		
1,139.8	+	1,587.6	=	<b>2,727.4 Kg</b>	<b>6,012.8</b>	<b>Lbs.</b>

**DROP HEIGHT**

**Calculation For Product Specific Gravities Exceeding 1.2**

Product Specific Gravity (PSG) x Packing Group Multiplication Factor (MF)

<u>PSG</u>	x	<u>MF</u>		<b>Packing Group:</b>	<b>II</b>
1.90	x	1.00		<u>Required Drop Height</u>	<u>Actual Drop Height</u>
		<b>1.90</b>	<b>Meter</b>	<b>74.8 Inches</b>	<b>75 Inches</b>